


MWIR-5

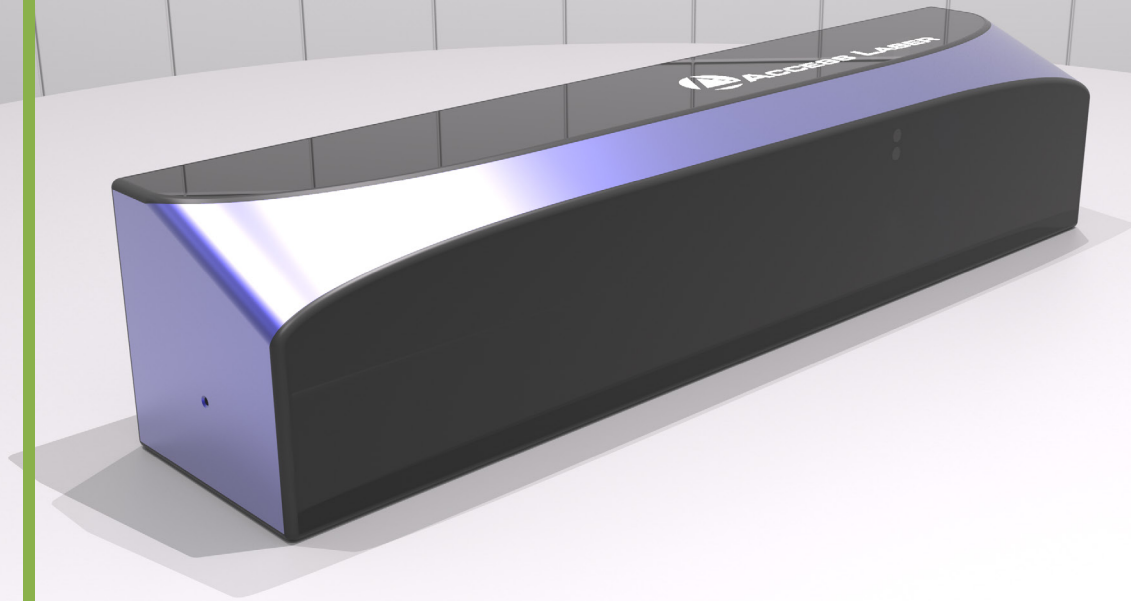

Laser Power

| | |
|-----------------|-----------------------|
| Wavelength | 5.2-5.7 μm |
| CW Power | 5 W |
| Peak Power | 5 W |
| Power Stability | $\pm 2\%$ |

Pulse Width Modulation Parameters

| | |
|----------------------------|-----------|
| Duty Cycle | 0-100 % |
| Pulse Repetition Frequency | 0-100 kHz |

Dimensions & Weight

| | |
|----------------------|-----------------------|
| Laser Weight | 33.8 lbs |
| Dimensions L x W x H | 28.8 x 3.9 x 5.0 inch |
| RF Driver Weight | 11.5 lbs |

Water Cooling

| | |
|----------------------------|-------------------------|
| Min Flow Rate | 3.8 LPM (1 GPM) |
| Recommended Flow Rate | 9.5 LPM (2.5 GPM) |
| Max Pressure | 10 bar (150 psi) |
| Required Chiller Stability | $\pm 0.1^\circ\text{C}$ |
| Storage Temp Range | 5-50 $^\circ\text{C}$ |

Beam Characteristics

| | |
|-----------------------|-----------------------------|
| Beam Waist Diameter | 2.7mm |
| Waist Location | Output Coupler |
| Mode Quality | $M^2 \leq 1.2$ |
| Full Divergence Angle | 2.8 mrad |
| Rise and Fall time | 200 μs |
| Polarization | $\geq 20:1$ Linear Vertical |

DC Power Requirements

| | |
|-----------|------|
| RF Driver | 28 V |
|-----------|------|

Heat & Cooling

| | |
|---------------------|---|
| Heat Dissipation | $\leq 600\text{W}$ |
| Cooling Requirement | Water Cooled Closed Loop |
| Working Temperature | 5 $^\circ\text{C}$ to 40 $^\circ\text{C}$ |

Notes

Power Stability calculated in CW at thermal equilibrium

$$+ \frac{P_{max} - P_{min}}{P_{max} + P_{min}}$$

Beam specifications measured at: $\frac{1}{e^2}$

All measurements taken at the strongest line. All are specifications are subject to change without notice.



ACCESS LASER
Member of the TRUMPF Group

